


LED Spreader- and Boomlights

These compact LED lights are highly suitable for building into spreaders or booms. They are enclosed in anodised aluminium, and is adequate lighting to read by.

Their tiny size and weight makes mounting a breeze using only a couple of small screws and connecting a power source (12VDC).


These lights have a very low power consumption making them ideal for use in places where battery power are used.

Order them at John Mast


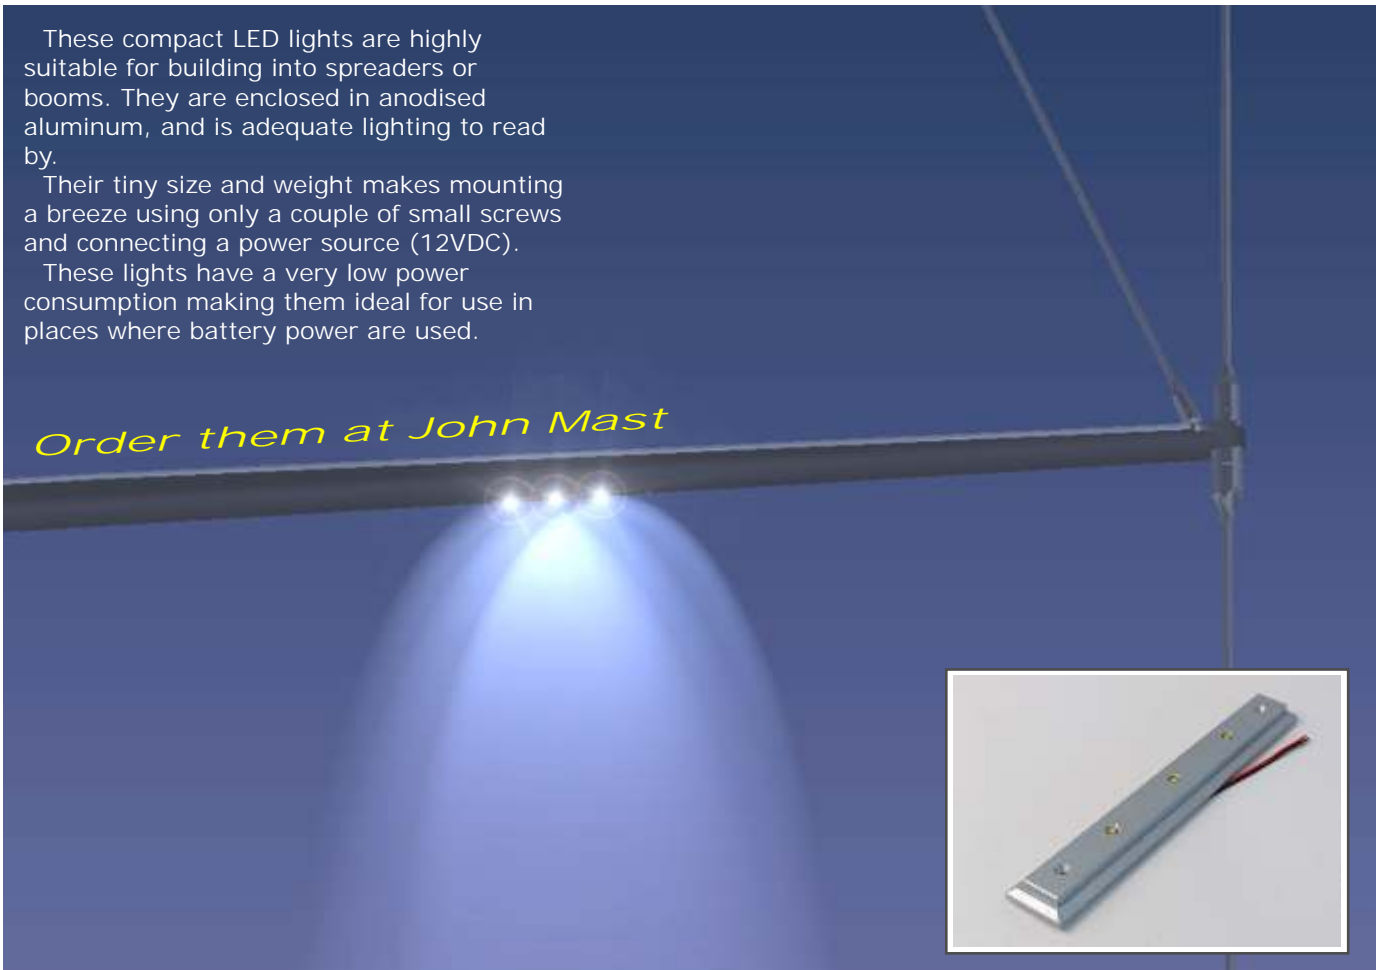


Mounting example

Lightbar mounted inside spreader

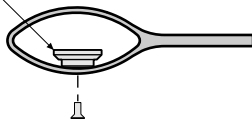

No cut-outs just holes for LED's and screws

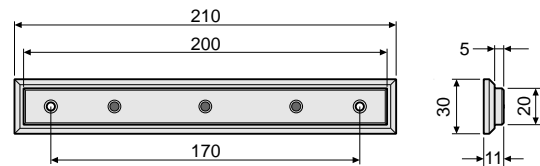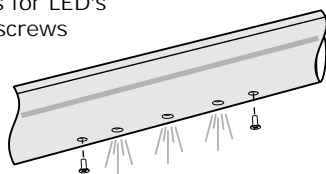

JM ordering No. 13 07 225

Type	LED 3x1W power LED	
Mounting	Surface mounting	
Material	Anodised aluminium	
Power Supply	12V/DC-24V/DC	
Operating Temperature	(-15°C - +55°C)	
Safety Degree	IP65	
Watts	3W (3x1W)	
MTBF og LED's	70.000 hours under normal operating conditions	
Connection	Red wire	+ (positive)
	Black wire	- (negative)